

**(19) World Intellectual Property Organization
International Bureau**



1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1

(43) International Publication Date
23 August 2001 (23.08.2001)

(10) International Publication Number
WO 01/60220 A1

PCT


- (51) **International Patent Classification⁷:** A47J 31/06, B65D 81/00
- (21) **International Application Number:** PCT/US01/04723
- (22) **International Filing Date:** 14 February 2001 (14.02.2001)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
60/183,569 18 February 2000 (18.02.2000) US
09/782,665 13 February 2001 (13.02.2001) US
- (71) **Applicant:** KEURIG, INCORPORATED [US/US]; 101 Edgewater Drive, Wakefield, MA 01880 (US).
- (72) **Inventors:** LAZARIS, Nicholas, G.; 1947 Beacon Street, Newton, MA 02468 (US). BEAULIEU, Roderick, H.; 196 Hines Road, Cumberland, RI 02864 (US).
- (74) **Agents:** GAUTHIER, Maurice, E. et al.; Samuels, Gauthier Stevens, Suite 3300, 225 Franklin Street, Boston, MA 02110 (US).
- (81) **Designated States (national):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

- (54) Title: DISPOSABLE SINGLE SERVE BEVERAGE FILTER CARTRIDGE**

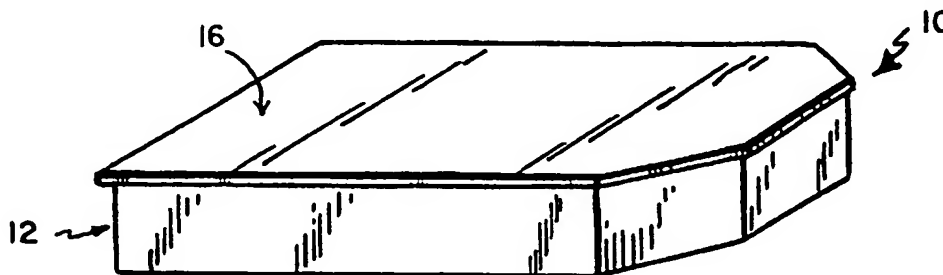

(57) Abstract: A beverage filter cartridge comprises an outer container (12) with an access opening. A filter element (14) is received in and configured and arranged to subdivide the interior of the container into first and second chambers (A, B). A beverage medium is stored in the first chamber (A). A lid (16) closes the access opening. The lid has a first section overlying the first chamber (A) and a second section overlying the second chamber (B). The first section of the lid is yieldably pierceable to accommodate an inflow of liquid into the first chamber for infusion with the beverage medium to produce a beverage. The filter element is permeable to accommodate a flow of the beverage from the first chamber into the second chamber, and the second section of the lid (16) is yieldably pierceable to accommodate an outflow of the beverage from the second chamber to the exterior of the cartridge.

WO 01/60220 A1

DISPOSABLE SINGLE SERVE BEVERAGE FILTER CARTRIDGE**CROSS REFERENCES TO RELATED APPLICATIONS**

5 This application claims priority from Provisional Patent Application Serial No. 60/183,569 filed 02/18/2000 and U.S. Utility Patent Application Serial No. 09/782,665 filed on 02/13/2001, both of which are incorporated herein by reference in their entirety.

10

FIELD OF THE INVENTION

 This invention relates to disposable single serve beverage filter cartridges.

15

DESCRIPTION OF THE PRIOR ART

 A known disposable single serve beverage filter cartridge is disclosed in U.S. Patent Nos. 5,325,765 and 5,840,189 (Sylvan et al), dated respectively July 5, 1994 and November 24, 1998. This beverage filter cartridge is comprised basically of an
20 impermeable yieldably piercable cup-shaped container thermoformed or injection molded from a relatively rigid plastic material, and internally subdivided by a permeable cone-shaped filter into first and second chambers. A granular or powered dry beverage medium, e.g., roasted ground coffee, is stored in the first chamber, and the container is closed by an impermeable yieldably piercable lid comprising a laminate
25 of metallic foil and plastic.

 During a brewing cycle, the lid and container bottom are pierced from opposite directions, respectively, by tubular inlet and outlet probes. The inlet probe admits heated liquid into the first chamber for infusion with the beverage medium, and the resulting brewed beverage passes through the filter into the second chamber from
30 which it exits via the outlet probe for delivery to an underlying cup.

 This known beverage filter cartridge has gained rapid and increasingly widespread acceptance, notwithstanding certain problems and disadvantages relating to its use that have persisted since its initial introduction.

For example, as compared to the lid, the bottom of the cup-shaped container is relatively thick, with a higher resistance to piercing. The bottom cannot easily be thinned without adversely affecting the required thickness of the cup's sidewall to prevent permeability to oxygen and the ability to connect the filter material to the
5 sidewall without damaging the oxygen barrier material. Thus, in the course of being punctured by the outlet probe, the bottom exhibits a tendency to distort inwardly, with an accompanying buckling of the container sidewall. Bottom distortion accompanied by sidewall buckling can adversely affect the puncturing process, resulting in leakage around the outlet probe.

10 A related problem stems from the need to equip the brewers with expensive metallic outlet probes that can be sharpened to the extent necessary to effect piercing of the more resistant container bottoms, and that can resist wear over prolonged periods of use.

Additionally, some of the brewed liquid beverage is not able to be evacuated
15 because the outlet probe opening is above the bottom of the container and some of the beverage has no means of drainage.

What is needed, therefore, is an improved beverage filter cartridge that obviates or at least significantly minimizes the above-noted problems and disadvantages.

20

SUMMARY OF THE INVENTION

In accordance with the present invention, a beverage filter cartridge includes an impermeable outer container having an access opening. A planar filter element is
25 configured and arranged to subdivide the container interior into first and second chambers. A beverage medium is stored in the first chamber and an impermeable lid closes the access opening.

The lid has a first section overlying the first chamber and a second section overlying the second chamber. The first and second lid sections are yieldably
30 pierceable, respectively, from the same direction, by single or multiple inlet and outlet probes. The inlet probe admits heated liquid into the first chamber for infusion with the beverage medium, and the resulting brewed beverage passes through the filter element into the second chamber, from which it exits via the outlet probe.

The lid material has a lesser resistance to being yieldably pierced as compared to the resistance of the container bottom, and is thus less prone to inward distortion with accompanying buckling of the container sidewall. The net result is a cleaner puncture and an improved seal around the outlet probe.

5 The relative ease with which the lid may be pierced also makes it possible to equip the brewers with less expensive plastic inlet and outlet probes, in single or multiple configurations.

These and other features and advantages of the present invention will now be described in greater detail with reference to the accompanying drawings, wherein:

10

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a perspective view of one embodiment of a beverage filter cartridge
15 in accordance with the present invention;

Figure 2 is a top plan view of the beverage filter cartridge shown in Figure 1, with portions of the lid and filter element broken away to illustrate details of the container interior;

Figure 3 is a sectional view on an enlarged scale taken along line 3-3 of Figure
20 2;

Figure 4 is an exploded view of the basic components comprising the beverage filter cartridge shown in Figures 1-3;

Figure 5 is a cross sectional view similar to Figure 3 showing the lid of the beverage filter cartridge punctured by inlet and outlet probes during a beverage
25 brewing cycle;

Figure 6 is a perspective view of another embodiment of a beverage filter cartridge in accordance with the present invention;

Figure 7 is an exploded view of the basic components of the beverage filter cartridge shown in Figure 6;

30 Figure 8 is a side view of the beverage filter cartridge looking in the direction of arrow "X" in Figure 6;

Figures 9, 10, 11 and 12 are sectional view on an enlarged scale taken respectively along lines 9-9, 10-10, 11-11 and 12-12 of Figure 8; and

Figure 13 is a sectional view similar to Figure 10 showing the lid of the beverage filter cartridge punctured by inlet and outlet probes during a beverage brewing cycle.

5

DETAILED DESCRIPTION OF ILLUSTRATED EMBODIMENTS

Referring initially to Figures 1-5, one embodiment of a beverage filter cartridge in accordance with the present invention is generally depicted at 10. The beverage filter cartridge includes an impermeable outer container 12, a permeable filter element 14, and an impermeable lid 16.

The outer container 12 is generally tray-shaped with a bottom wall 12a, a side wall 12b with a flat rim 12c surrounding an access opening 13, and a plurality of laterally spaced support ribs 12d projecting upwardly from the bottom wall and extending in parallel relationship in the lengthwise direction of the container.

As shown in Figure 3, the ribs 12d join the sidewall 12b at 18, curve downwardly and then extend in parallel relationship to the bottom 12a before again curving upwardly to terminate as at 20.

The filter element 14 is formed from sheet material shaped to conform to the shape of the upper edges of the support ribs. The filter element is received in the container 12, with the edges 14a of its front and back ends overlapping and sealed to the rim 12c of the container side wall 12b, and with the edges 14b of its sides overlapping and sealed to outermost ribs 12d which are formed integrally with the container side wall. When thus positioned, the filter element defines a first chamber "A" separate from a second chamber "B", the latter being in communication with open channels separating the support ribs 12d.

A beverage medium "M", typically roasted ground coffee, is loaded into chamber A, after which the lid 16 is sealed to the rim 12c of the container wall 12b (and to any overlapping sealed edge portions of the filter). When thus positioned, the lid has a first section 16a overlying chamber A, and a second section 16b overlying chamber B.

The outer container may be formed, typically by injection molding, from an impermeable heat sealable material.

The filter element 14 may be cut or blanked from any suitably pliable, permeable and yieldably piercable sheet material, a preferred example being cellulose polypropylene supplied by J.P. Crompton, Ltd. of Bury, Lancashire, England. The lid may be cut or blanked from any suitable impermeable heat sealable and yieldably piercable material, a preferred example being a metallic/polymer laminate supplied by Heat Seal-Winpak, Ltd. of Montreal, Canada. The lid has less resistance to being yieldably pierced as compared to the outer container, which may or may not be yieldably piercable.

During a brewing cycle, as shown in Figure 5, the cartridge can be oriented vertically, and the lid 16 is pierced with one or more tubular infusion probes 22 to admit hot water under pressure into chamber A for infusion with the beverage medium M. The resultant beverage passes through the filter element 14 into the channels defined between the support ribs 12d. From here, the beverage flows downwardly into chamber B from which it is extracted by one or more tubular exit probes 24 which pierce the lid and filter element at a location overlying chamber B. The probes 22, 24 are oriented in the same direction to operate on one side of the cartridge, without piercing the outer container. The soluble beverage medium is completely soaked because the rate of hot water being injected into the container is greater than the outflow rate provided by the outlet probes, resulting in the second chamber B becoming filled with beverage extract and forcing the first chamber A to become completely filled with hot water.

Although not shown, it will be understood that the cartridge may be oriented in other ways than as illustrated in Figure 5 before, during or after the brewing process.

A second embodiment of a beverage filter cartridge in accordance with the present invention is generally depicted at 30 in Figures 6-13. The cartridge components are illustrated separately in Figure 7, and include an outer container 32, a planar filter element 34, and a lid 36.

The container 32 has a bottom wall 38, a front wall 40, a back wall 42, and side walls 44, 46. The front, back and sidewalls extend upwardly from the bottom wall to a peripheral rim 48 surrounding an upper opening 50.

The side walls 44, 46 are appropriately contoured to define generally V-shaped ledges 52 extending between the front and back walls 40, 42, with the lower portions of the ledges 52 being spaced above the container bottom 38. The bottom 38 is

preferably contoured to provide an upwardly protruding centrally located boss 54.

The back wall 42 is contoured and the upper rim 48 is recessed to provide a well 56 opening towards the interior of the container.

The filter element 34 has front and back edge regions 34a, 34b, and side edge regions 34c. The filter element is configured, dimensioned and operatively positioned to subdivide the interior of the container into first and second chambers "A", "B", with the well 56 opening into and forming part of chamber B. When the filter element is thus positioned, it will be understood that its side edge regions 34c are secured as by heat sealing to the ledges 52 of the side walls 44, 46, and the front and back edge regions 34a, 34b are similarly secured to the front and back walls 40, 42. Preferably, the bottom of the filter element is also secured as by heat sealing to the upwardly protruding boss 54.

A beverage medium "M" is received through the upper opening 50 and stored in the first chamber A. The upper opening is then closed by securing the lid 36, as by heat sealing, to the peripheral container rim 48.

The outer container may be formed from impermeable heat sealable materials, a preferred example being polyethylene/EVOH/polystyrene supplied by Curwood Flexible Packaging of Oshkosh, Wisconsin, U.S.A.

The materials from which the filter element 34 and lid 36 are formed may be the same as those described previously for the filter element 14 and lid 16 of the first embodiment.

The lid 36 has a first section 36a overlying chamber A, and a second section 36b overlying the well 56.

As shown in Figure 13, at the onset of a brewing cycle, the lid section 36a is pierced by one or more inlet probes 58, and the lid section 36b and underlying portion of the filter element are pierced by an outlet probe 60. The inlet probe admits heated liquid into chamber A for infusion with the beverage medium M, and the resulting brewed beverage passes through the filter element into chamber B from which it exits via the outlet probe 60.

It will thus be seen that in both embodiments, the outer container is not pierced. Rather, liquid communication is established with the separate chambers A, B by inlet and outlet probes operating from the same side of the cartridge to pierce different sections of the readily piercable lid.

Although the outer container and lid have been described as being formed from impermeable materials, it will be understood by those skilled in the art that, alternatively, permeable materials may be employed for one or both of these components. Where permeable materials are employed, the completed cartridges will
5 preferably be subsequently enclosed, either individually or in batches, with impermeable wrappings. Materials for such wrappings are well known, and include for example EVOH films, aluminum foil, etc.

We claim:

1 1. A beverage filter cartridge comprising:
2 an outer container having an access opening:
3 a permeable filter element received in and configured and arranged to subdivide
4 the interior of said container into first and second chambers;
5 a soluble beverage medium stored in said first chamber; and
6 a lid closing said access opening, said lid having a first section overlying said
7 first chamber and a second section overlying said second chamber, the first section of
8 said lid being yieldably piercable to accommodate an inflow of liquid into said first
9 chamber for infusion with the beverage medium to produce a beverage, said filter
10 element being permeable to accommodate a flow of the beverage from said first
11 chamber into said second chamber, and the second section of said lid being yieldably
12 piercable to accommodate an outflow of the beverage from said second chamber to the
13 exterior of said cartridge.

1 2. The beverage filter cartridge of claim 1 wherein said lid has less
2 resistance to being yieldably pierced as compared to that of said container.

1 3. The beverage filter cartridge of claim 1 wherein said filter element is
2 yieldably piercable.

1 4. The beverage filter cartridge of claim 1 wherein a first section of said
2 filter element coacts with interior surfaces of said container to define said first
3 chamber, and a second section of said filter element underlies the second section of
4 said lid.

1 5. The beverage filter cartridge of claim 1 wherein said container is
2 provided with a flat rim surrounding and projecting outwardly from, said access
3 opening, and wherein edge segments of said filter element overlap and are heat sealed
4 to segments of said rim.

1 6. The beverage filter cartridge of claim 4 wherein the second sections of
2 both said lid and said filter element are yieldably piercable to accommodate the
3 beverage outflow from said second chamber.

1 7. The beverage filter cartridge of claim 1 wherein said filter element
2 comprises a planar sheet of permeable yieldably piercable material.

1 8. The beverage filter cartridge of claim 1 wherein said outer container is
2 impermeable.

1 9. The beverage filter cartridge of claims 1 or 8 wherein said lid is
2 impermeable.

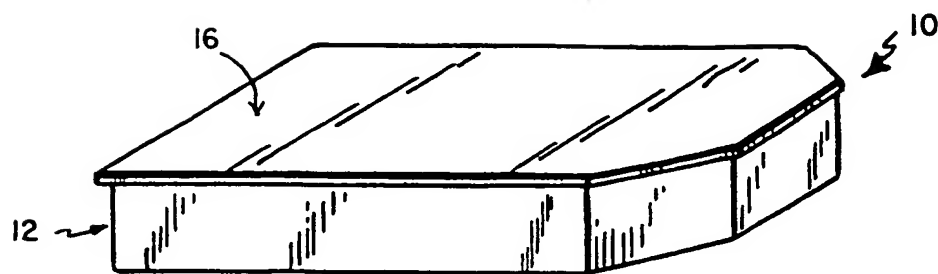


FIG. 1

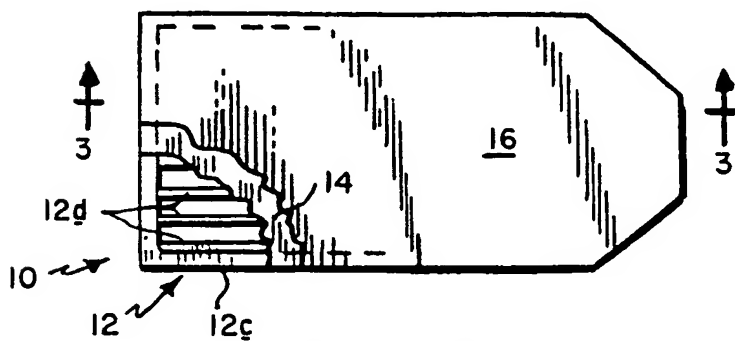


FIG. 2


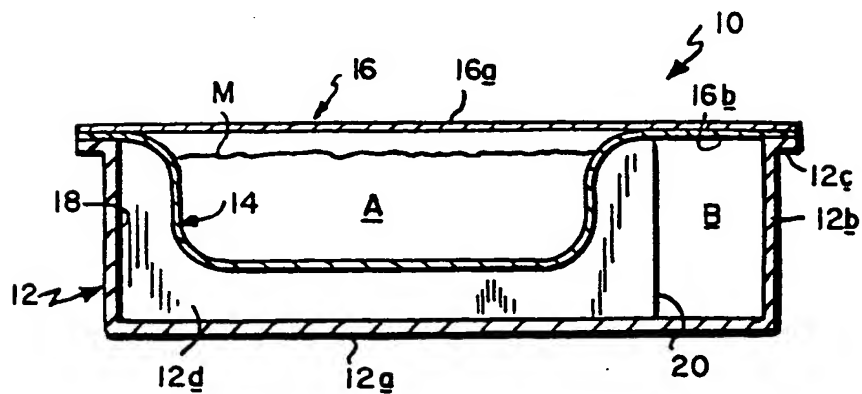


FIG. 3

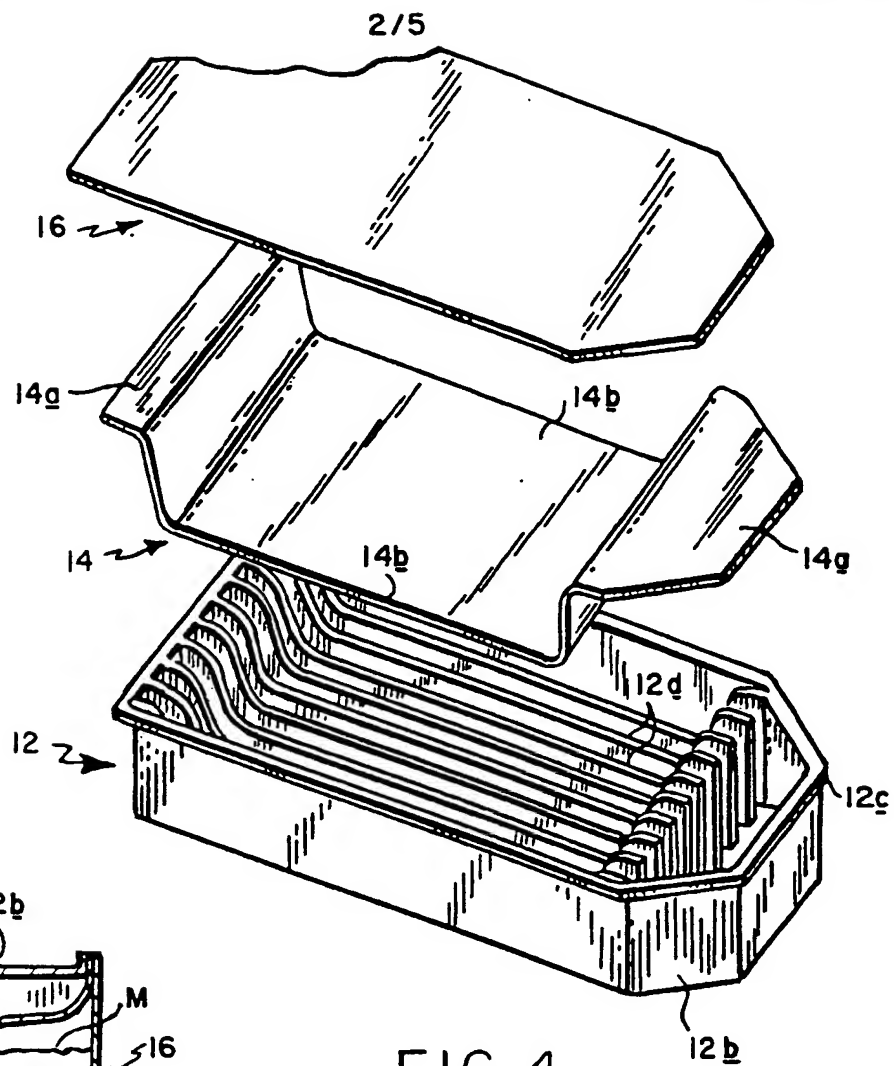

3/5

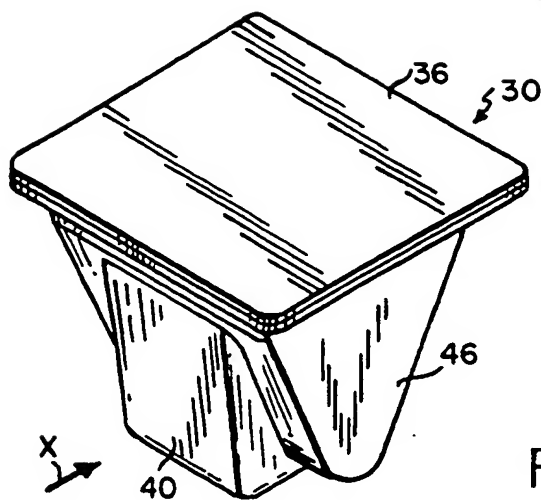


FIG. 6

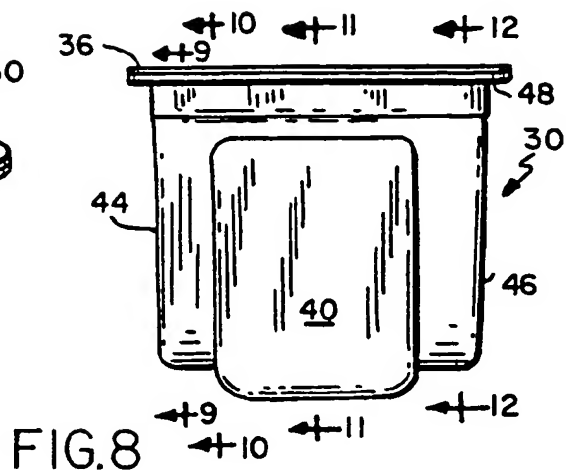
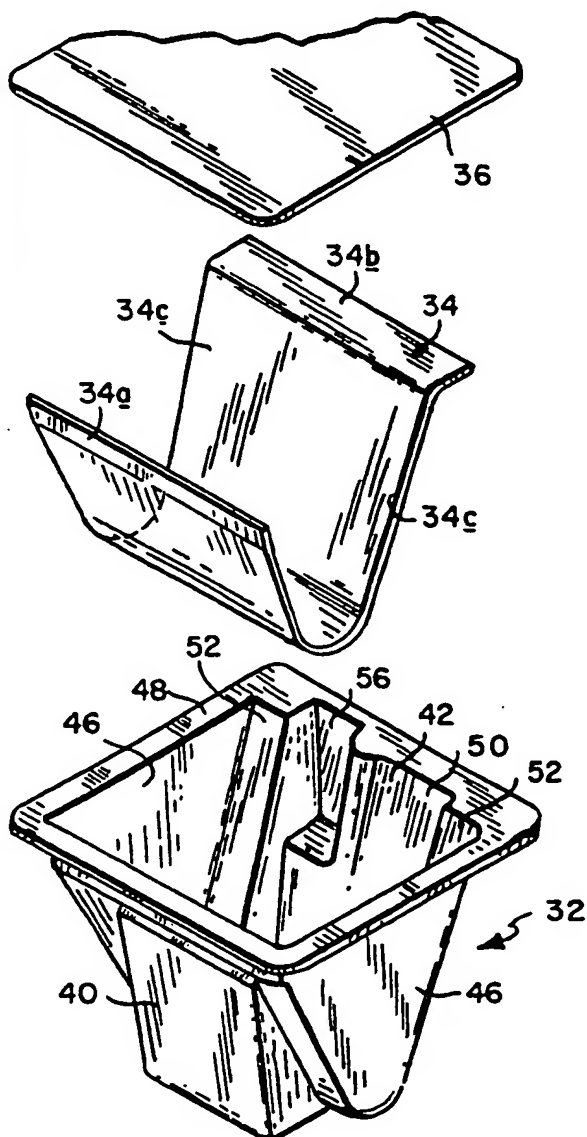


FIG. 7



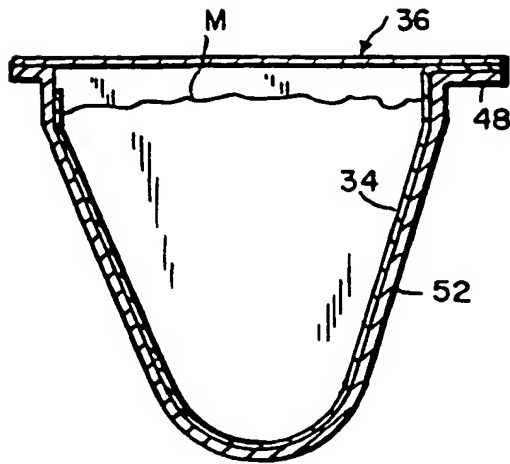


FIG. 9

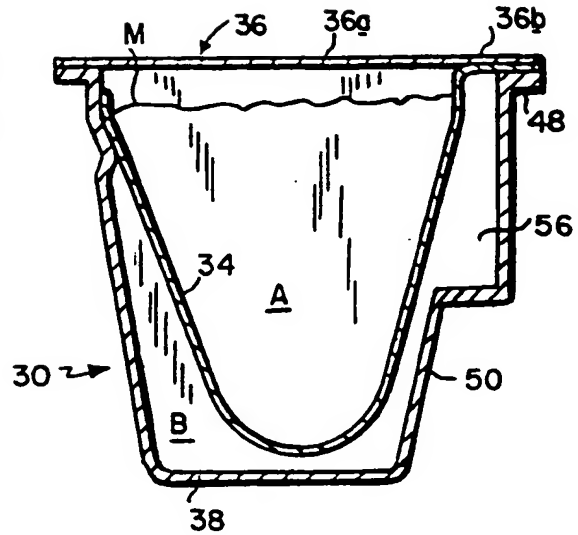


FIG. 10

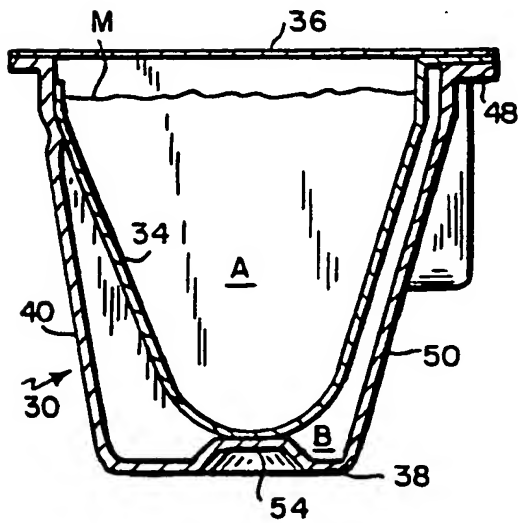


FIG. 11

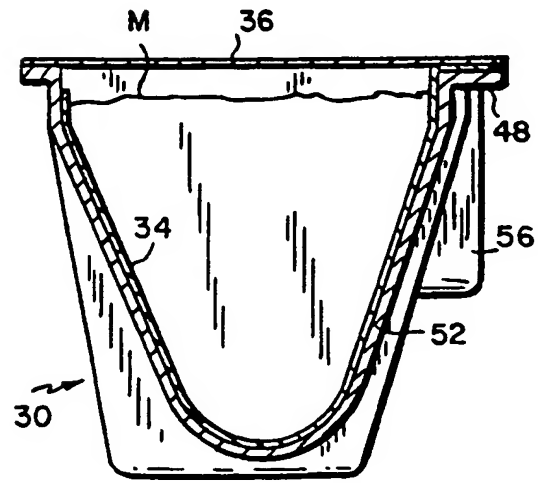


FIG. 12

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 01/04723

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A47J31/06 B65D81/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A47J B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 325 765 A (SYLVAN JOHN E ET AL) 5 July 1994 (1994-07-05) cited in the application the whole document	1
A	US 5 840 189 A (SYLVAN JOHN E ET AL) 24 November 1998 (1998-11-24) cited in the application the whole document	1



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

16 May 2001

Date of mailing of the international search report

23/05/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

Van der Plas, J

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/04723

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5325765 A	05-07-1994	US 5840189 A	24-11-1998
US 5840189 A	24-11-1998	US 5325765 A	05-07-1994